C.I.M. Industries Inc.
A Chase Corporation Company

Where Waterproofing Meets Sunlight

Traditional waterproofing membranes are built for performance; Color Shield Topcoat is built for performance *and* aesthetics.

Color Shield is a two-component, **UV-resistant,** polyaspartic coating engineered to maintain performance, integrity, and appearance in **above-grade and immersion environments**. This durable and fast-curing topcoat can be applied over all CIM waterproofing membranes. From rooftop decks to water features, Color Shield provides **durable protection where exposure is non-negotiable**.

FEATURES

- UV-Resistant/Non-Chalking
- Multiple Color Options
- Liquid Application with a 1:1 Mix Ratio
- Excellent Self-Leveling Properties
- Easy Application to Complex Shapes
- Excellent Adhesion to CIM Waterproofing Membranes
- Impervious to Water & Most Aqueous Chemicals

APPLICATIONS

- Decorative Fountains & Water Features
- Residential & Commercial Balconies
- Parking Decks & Podium Structures
- Rooftop Terraces & Amenity Decks
- Manufacturing & Industrial Facilities

COLOR OPTIONS*

White | Slate Gray | Sky Blue | Light Tan | Dark Tan

*Custom Colors Available

PROPERTIES

Mix Ratio	1:1 by Volume
Mixing Time	3 Minutes
Working Time*	45-60 Minutes
Film Thickness	12 mil Dry Minimum
Coverage Rate	1 gal/100 ft^2
Time to Recoat*	2-4 Hours
Shore Hardness	D65 ± 5
Water Absorption (ASTM D570)	<0.8%

*These times are typical when the temperature is 77°F (25°C). Times will vary with differing temperatures.

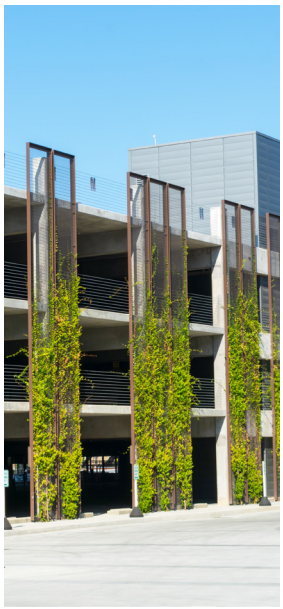



CIM WATERPROOF COATINGS: KEEP WATER WHERE YOU WANT IT

chasecorp.com

CHASE Construction Products
Royston® Tapecoat® NEPTCO ZAPPA