




NOTES: 1. (OPTIONAL/NOT SHOWN) PRIME WOOD WITH CIM 61TN OR
CIM EMT EPOXY PRIMER.
2. TOPCOAT MAY BE APPLIED AT THICKNESSES GREATER THAN 60 MILS.
CONTACT CIM FOR INFORMATION ON EXTENDED WARRANTIES.

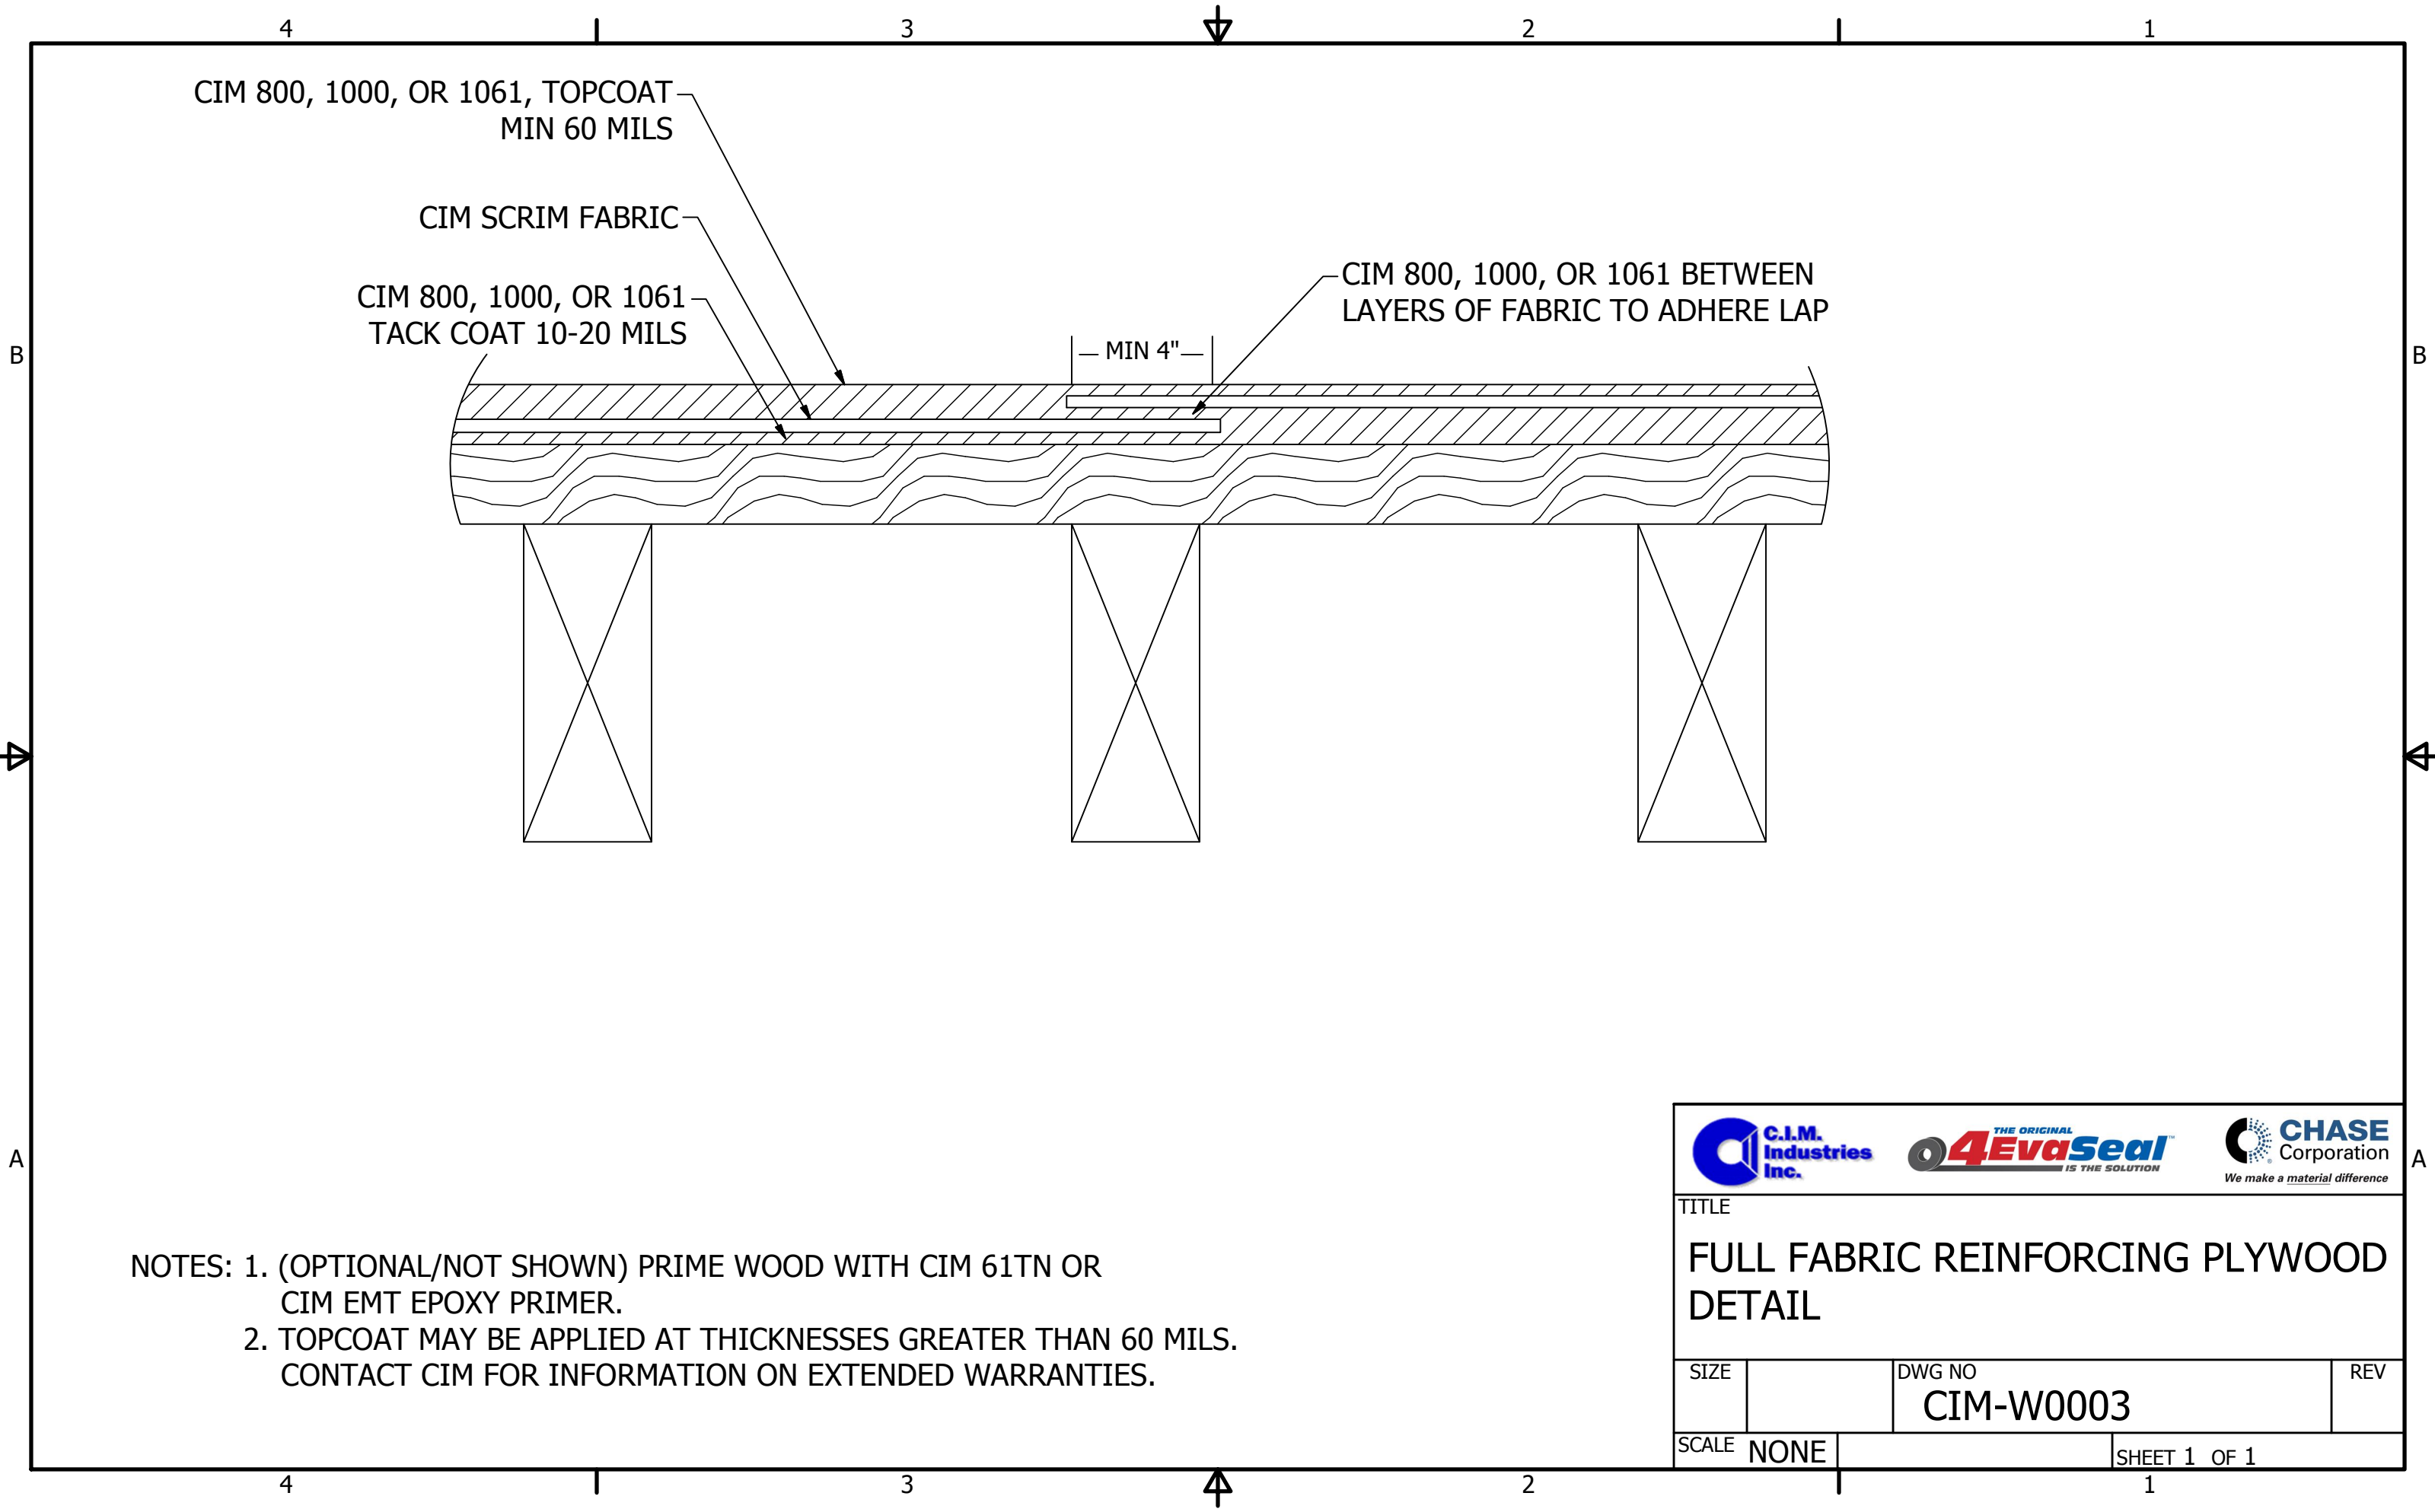

TITLE			
FULL FABRIC REINFORCING PLYWOOD DETAIL			
SIZE		DWG NO	REV
		CIM-W0003	
SCALE	NONE		SHEET 1 OF 1